




DIN 7991 / ISO 10642

INOX A2

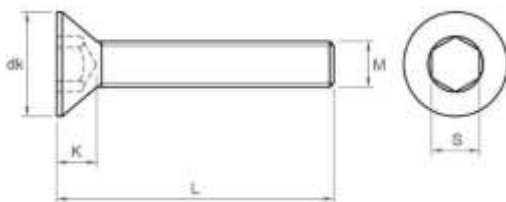

Dimensions	M2.5	M3	M4	M5	M6	M8	M10	M12	M16	M20
S	1.27	2	2.5	3	4	5	6	8	10	12
K.max	1.5	1.7	2.3	2.8	3.3	4.4	5.5	6.5	7.5	8.5
dK	5	6	8	10	12	16	22	24	30	36
PAS	0.45	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5
Fraisage	90°	90°	90°	90°	90°	90°	90°	90°	90°	90°

L/D	M2.5	M3	M4	M5	M6	M8	M10	M12	M16	M20
4		○								
5	○	○	○							
6	○	○	○	○						
8	○	○	○	○						
10	○	○	○	○	○	○				
12	○	○	○	○	○	○				
14		○	○	○	○	○				
16	○	○	○	○	○	○	○			
18		○	○	○	○	○				
20	○	○	○	○	○	○	○	○		
22		○	○	○	○	○				
25		○	○	○	○	○	○	○	○	
30		○	○	○	○	○	○	○	○	
35		○	○	○	○	○	○	○	○	
40			○	○	○	○	○	○	○	○
45			○	○	○	○	○	○	○	○
50			○	○	○	○	○	○	○	○
55				○	○	○	○	○	○	○
60				○	○	○	○	○	○	○
70				○	○	○	○	○	○	○
80				○	○	○	○	○	○	○
90					○	○	○	○	○	○
100					○	○	○	○	○	○
110						○	○	○	○	○
120						○	○	○	○	○
130						○	○	○	○	○
140						○	○	○	○	○
150						○	○	○	○	○