


DIN 7991 / ISO 10642

CLASSE 10.9 ZINGUE

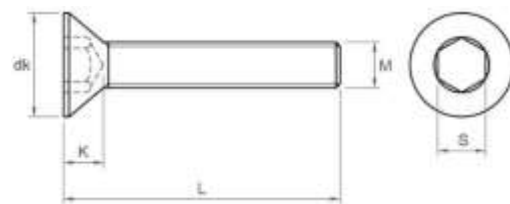

Dimensions	M3	M4	M5	M6	M8	M10	M12	M16	M20
S	2	2.5	3	4	5	6	8	10	12
K.max	1.7	2.3	2.8	3.3	4.4	5.5	6.5	7.5	8.5
dK	6	8	10	12	16	20	24	30	36
PAS	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5
Fraisage	90°	90°	90°	90°	90°	90°	90°	90°	90°

L/D	M3	M4	M5	M6	M8	M10	M12	M16	M20
6	○	○							
8	○	○	○	○					
10	○	○	○	○	○				
12	○	○	○	○	○				
14		○	○	○					
16	○	○	○	○	○	○			
18				○	○				
20	○	○	○	○	○	○	○		
22				○					
25	○	○	○	○	○	○	○	○	
30	○	○	○	○	○	○	○	○	○
35		○	○	○	○	○	○	○	○
40		○	○	○	○	○	○	○	○
45			○	○	○	○	○	○	○
50				○	○	○	○	○	○
55				○	○			○	
60				○	○	○	○	○	○
70				○	○	○	○	○	○
80				○	○	○	○	○	○
90					○	○	○	○	○
100						○		○	○
110						○		○	○
120								○	○
130								○	○