


DIN 913 / ISO 4026

45 H BRUT

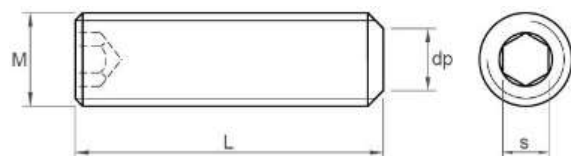


Dimensions	M1.6	M2	M3	M4	M5	M6	M8
S	0.7	0.9	1.5	2	2.5	3	4
dp	0.8	1	2	2.5	3.5	4	5.5
PAS	0.35	0.4	0.5	0.7	0.8	1	1.25

L/D	1.6	M2	M3	M4	M5	M6	M8
2		○					
2.5	○	○					
3	○	○	○	○			
4	○	○	○	○	○	○	
5	○	○	○	○	○	○	
6	○	○	○	○	○	○	○
8	○	○	○	○	○	○	○
10	○	○	○	○	○	○	○
12			○	○	○	○	○
14				○		○	○
16			○	○	○	○	○
18				○	○	○	○
20			○		○	○	○
25				○	○	○	○
30				○	○	○	○
35				○	○	○	○
40				○	○	○	○
45					○	○	○
50						○	○
55						○	○
60						○	○
70						○	○
80							○



DIN 913 / ISO 4026

45 H BRUT

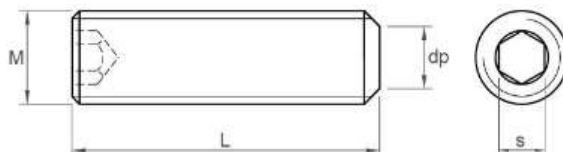

Dimensions	M10	M12	M14	M16	M20	M24	M30
S	5	6	6	8	10	12	14
dp	7	8.5	10	12	15	18	23
PAS	1.5	1.75	2	2	2.5	3	3.5

L/D	M10	M12	M14	M16	M20	M24	M30
8	○						
10	○	○					
12	○	○		○			
16	○	○	○	○			
18	○	○					
20	○	○	○	○	○	○	
25	○	○		○	○	○	
30	○	○	○	○	○	○	○
35	○	○		○	○	○	○
40	○	○	○	○	○	○	○
45	○	○		○	○	○	○
50	○	○	○	○	○	○	○
55	○	○		○	○	○	○
60	○	○		○	○	○	○
70	○	○		○	○	○	○
80	○	○		○	○	○	○
90	○	○		○	○	○	○
100	○					○	○
110						○	○
120						○	○