




DIN 933 / ISO 4017

FILETAGE TOTAL 8.8

GEOMET 500 A

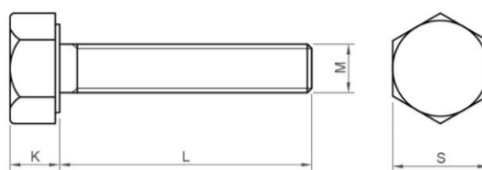

| Dimensions | M6 | M8 | M10 | M12 | M16 | M20 | M24 |
|---------------------|---|------|-------|-------|-----|------|-----|
| S : ISO/DIN | 10 | 13 | 16/17 | 18/19 | 24 | 30 | 36 |
| K | 4 | 5.3 | 6.4 | 7.5 | 10 | 12.5 | 15 |
| PAS | 1 | 1.25 | 1.5 | 1.75 | 2 | 2.5 | 3 |
| b:longueur filetage | 2xØ+6:L<125mm / 2xØ+12:125mm<L>200mm / 2xØ+25:L>200mm | | | | | | |

| L/D | M6 | M8 | M10 | M12 | M16 | M20 | M24 |
|-----|----|----|-----|-----|-----|-----|-----|
| 10 | ○ | | | | | | |
| 12 | ○ | ○ | | | | | |
| 14 | ○ | | | | | | |
| 16 | ○ | ○ | ○ | | | | |
| 18 | ○ | | | | | | |
| 20 | ○ | ○ | ○ | ○ | | | |
| 25 | ○ | ○ | ○ | ○ | ○ | | |
| 30 | ○ | ○ | ○ | ○ | ○ | ○ | |
| 35 | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 40 | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 45 | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 50 | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 55 | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 60 | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 65 | | ○ | ○ | ○ | ○ | ○ | ○ |
| 70 | | ○ | ○ | ○ | ○ | ○ | ○ |
| 75 | | | | ○ | ○ | ○ | ○ |
| 80 | | | ○ | ○ | ○ | ○ | ○ |
| 90 | | | ○ | ○ | ○ | ○ | ○ |
| 100 | | | ○ | ○ | ○ | ○ | ○ |
| 110 | | | | | ○ | ○ | ○ |
| 120 | | | | | ○ | ○ | ○ |
| 160 | | | | | | | ○ |